

DATA SHEET



Earth Leakage version shown

APPLICATION:

High quality scalable power distribution for the Professional Audio Visual, Rental, Staging and Installation Markets.

KEY FEATURES:

- ◆ High Quality Rack Mount Enclosure
- ◆ Durable Laser Engraved Legend
- ◆ High Quality Circuit Breakers
- ◆ Rugged Connectors
- ◆ Integrated 3-Phase Digital Multimeter
- ◆ Microprocessor Controlled L1-L2-L3-N-E Status LED
- ◆ Designed to be used with our range of 32A Sub-Distribution boards
- ◆ Service power outlets on dedicated Earth Leakage (Independent of main system)

OPTIONS:

- ◆ Earth Leakage
 - 30mA Earth leakage protection
 - No Earth leakage protection **
- ◆ Remote monitoring option ***
- ◆ Stainless steel enclosure option for corrosive environments

SPECIFICATIONS:

Inputs

- ◆ 1 x 63A 380V 3-Phase L1-L2-L3+N+E
 - 1 x 5-Pin 63A C-form plug on 1.5m cable
 - 1 x 4-Pole 63A Overload Breaker

Outputs

- ◆ 3 x 32A 380V 3-Phase L1-L2-L3+N+E Circuits
 - 3 x 5-Pin 32A C-form connector
 - 3 x 32A 3-Pole Overload Breaker
- ◆ 3 x 32A 220V 1-Phase L+N+E Circuits
 - 3 x 3-Pin 32A C-form connector
 - 3 x 32A 1-Pole Overload Breaker


Service Outlets

- ◆ 30mA Earth Leakage Protected Service Sub-Distribution Board
 - 3 x 16A SA Service Plug *
 - 3 x 16A 1-Pole Overload Breaker


* Available with BS Standard / Euro Standard Outlet

** Please consult local electrical regulations for approvals


*** Requires separate network management unit (sold separately)

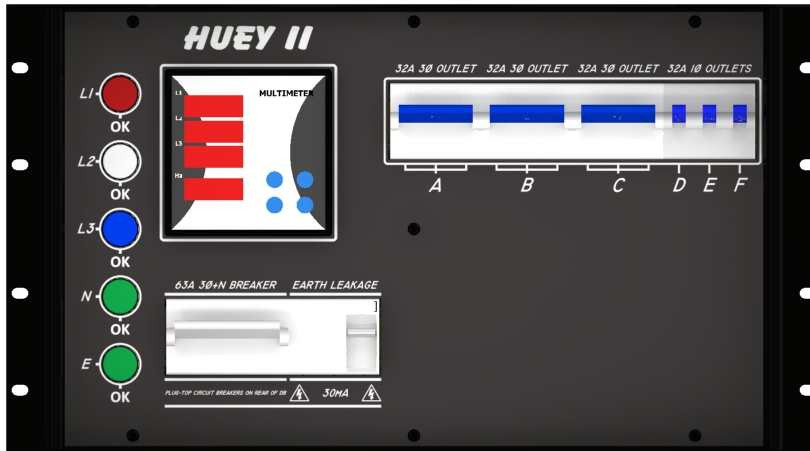

EARTH LEAKAGE VERSION

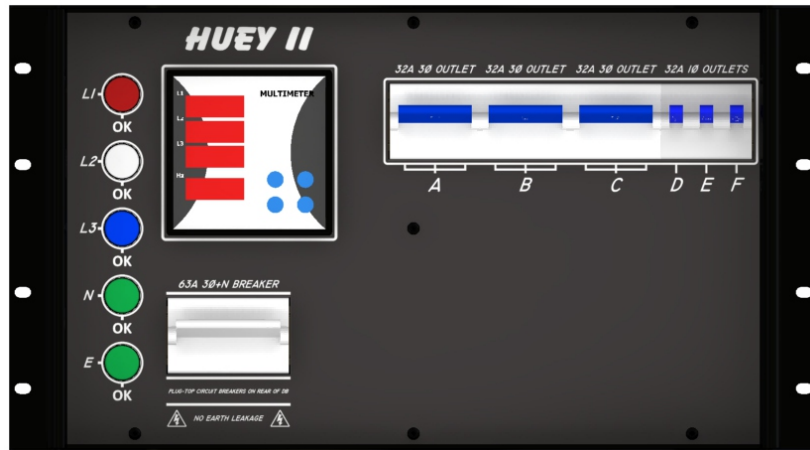

NON - EARTH LEAKAGE VERSION

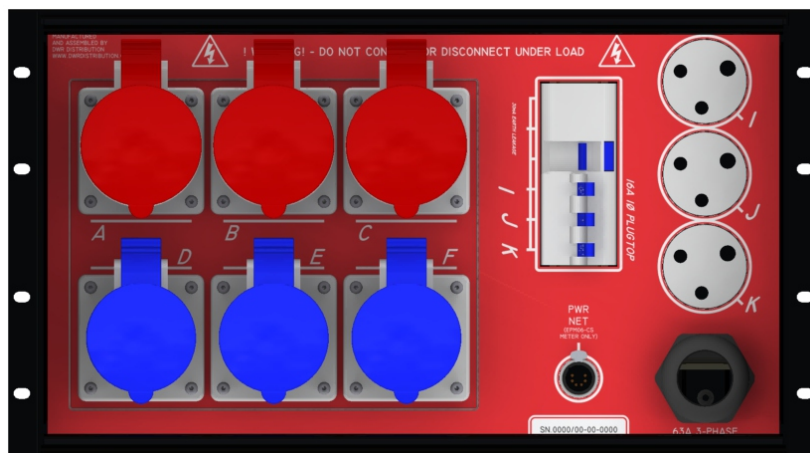

REAR VIEW

DIMENSIONS:

- ◆ 19" Rack Standard
- ◆ 6u Rack Space
- ◆ 436.4mm Mounting depth