

# Little Lotta 250A 3-Phase Distro

Posted on February 26, 2025



**LITTLE LOTTA**

## Little Lotta 250A 3-Phase Distro

### **APPLICATION:**


High quality scalable power distribution for the Professional Audio Visual, Rental, Staging and Installation Markets.

### **KEY FEATURES:**

- High Quality Rack Mount Enclosure
- Durable Laser Engraved Legend
- High Quality Circuit Breakers
- Rugged Connectors
- Integrated 3-Phase Digital Multimeter
- Microprocessor Controlled L1-L2-L3-N-E Status LED
- Designed to be used with our range of 63A and 32A Sub-Distribution boards
- Up to two 250A DB's can be looped for 500A Distribution System
- Service power outlets on dedicated Earth Leakage (Independent of main system)

**OPTIONS:**

- Intelligent Protection\*\*
- Over/Under Voltage Programmable Disconnect Contactor
- Over Current Programmable Disconnect Contactor
- Remote monitoring option \*\*\*
- Stainless steel enclosure option for corrosive environments

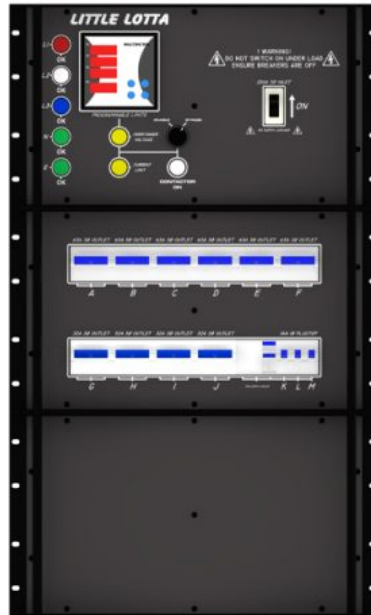


## ***LITTLE LOTTA***

### **SPECIFICATIONS:**

#### **Inputs**

- 1 x 500A 380V 3-Phase L1-L2-L3+N+E
- 5 x 500A Powersafe Terminal
- 1 x 4-Pole 250A Overload Breaker

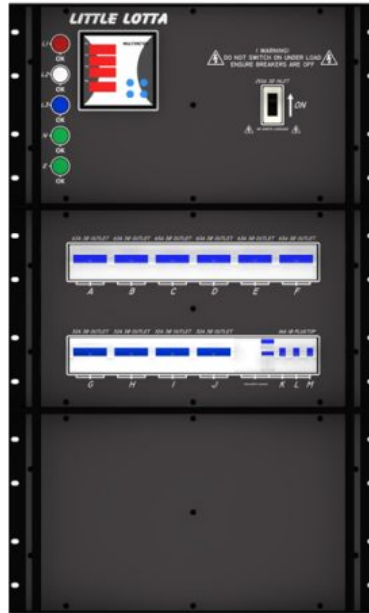

## ***LITTLE LOTTA***

### **Outputs**

- 6 x 63A 380V 3-Phase L1-L2-L3+N+E Circuits
- 6 x 5-Pin 63A C-form connector
- 6 x 63A 3-Pole Overload Breaker
- 4 x 32A 380V 3-Phase L1-L2-L3+N+E Circuits
- - 4 x 5-Pin 32A C-form connector
- - 4 x 32A 3-Pole Overload Breaker

### **Loop**

- 1 x 500A 380V 3-Phase L1-L2-L3+N+E
- - 5 x 500A Powersafe Terminal
- Service Outlets

## Little Lotta 250A 3-Phase Distro

- 30mA Earth Leakage Protected Service Sub-Distribution Board
- 3 x 16A SA Service Plug \*
- 3 x 16A 1-Pole Overload Breaker
- DIMENSIONS:
  - u 19" Rack Standard
  - u 18u Rack Space
  - u 631.4mm Mounting depth



**LITTLE LOTTA**

- \* Available with BS Standard / Euro Standard Outlet
- \*\* Contactor Bypass Switch with this option
- \*\*\* Requires separate network management unit (sold separately)

See all [Power Distribution Systems](#) here!