Umate LM O – Outdoor Fine Pitch, Quality Within Reach

Posted on April 14, 2026



The Unilumin LM O offers full front and rear maintenance, along with IP65 protection in a die-cast cabinet. Features include 1000 × 1000 mm and 500 × 500 mm panels that can be mixed and matched, with support for stacking, wall mounting, and hanging. Right-angle and rounded corner solutions are also available

Application Scenario

Copyright © DWR Distribution



Shopping Mall

Copyright © DWR Distribution



Outdoor Billboard

Copyright © DWR Distribution



High Brightness 5500-6500nits

Stronger visual impact and greater advertising effectiveness.

High-brightness images can quickly catch the eye.

Combined with high contrast and rich colour saturation, the content becomes more visually engaging, improving brand visibility and driving higher conversion rates.

The Umate LM O features a standard brightness of 5,500 nits, delivering up to 30% higher brightness compared to conventional products.

Versatile

Copyright © DWR Distribution

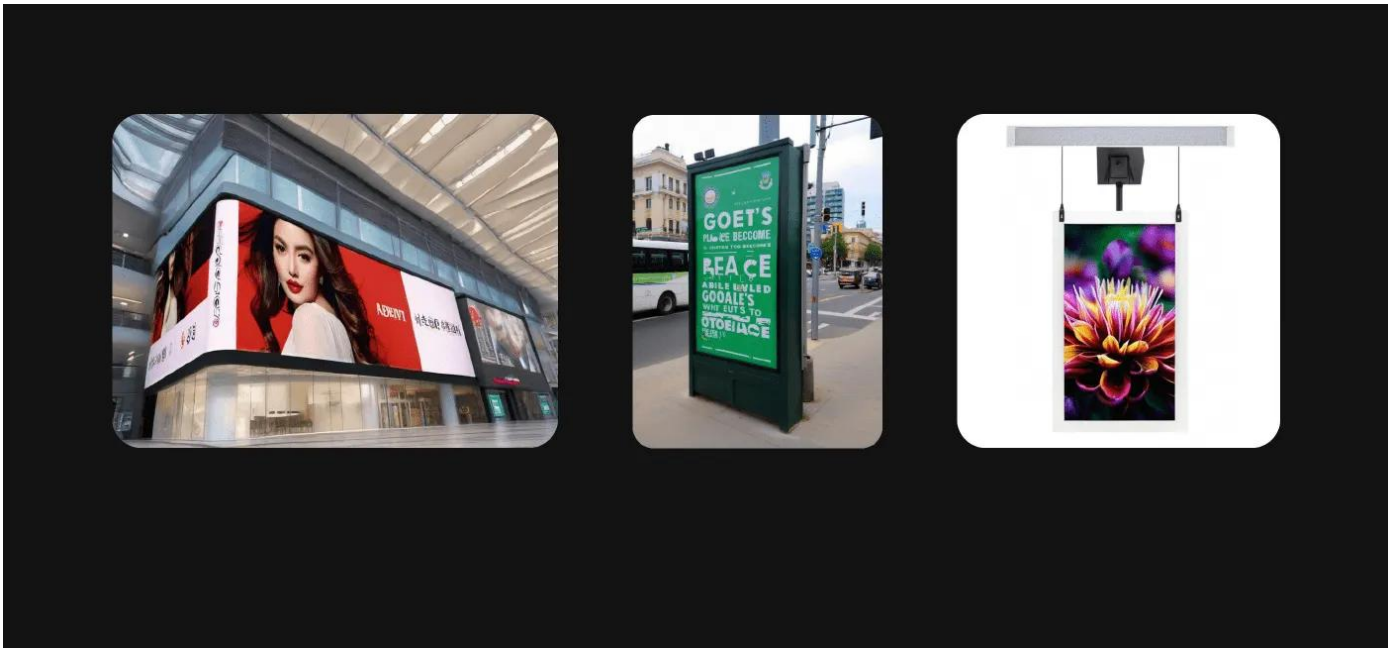

Redefine the visual possibilities of outdoor Spaces

Full-scene coverage

Shopping mall, exhibition halls, bus stops, squares, event venues, store entrances, exterior walls of buildings, and other places.

Copyright © DWR Distribution