


Bart 32A 3-Phase Distro

Posted on January 31, 2025

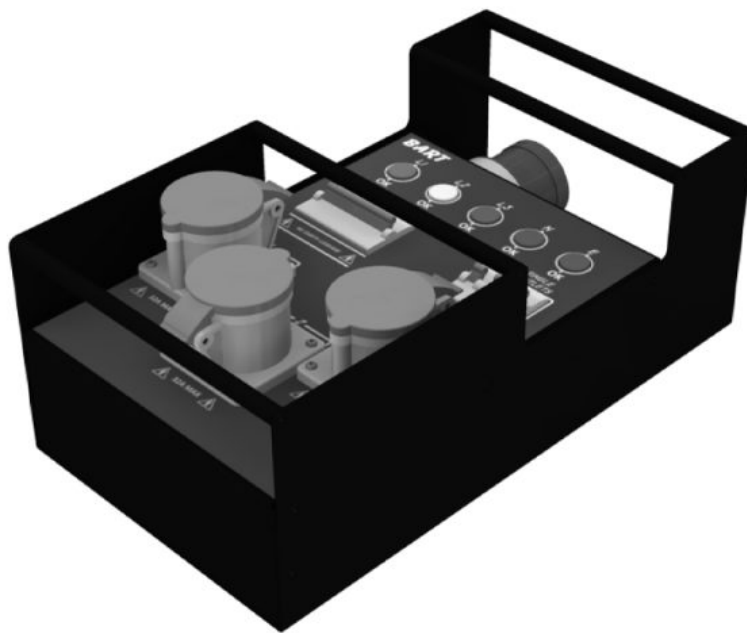

BART

Bart 32A 3-Phase Distro

APPLICATION:

High quality scalable power distribution for the Professional Audio Visual, Rental, Staging and Installation Markets.

KEY FEATURES:

- High Quality Enclosure
- Durable Laser Engraved Legend
- High Quality Circuit Breakers
- Rugged Connectors
- Microprocessor Controlled L1-L2-L3-N-E
- Status LED
- Designed to be used with our range of 63A Distribution boards or as a stand-alone distribution board
- Integrated Protective Handles
- Includes 2xM10 attachments for Truss mounting
- Includes durable protective bag



ONLY AVAILABLE WITHOUT EARTH LEAKAGE

BART



OPTIONS:

- Stainless steel enclosure option for corrosive environments


SPECIFICATIONS:

Inputs

- 1 x 32A 380V 3-Phase L1-L2-L3+N+E
- 1 x 5-Pin 32A C-form connector
- 1 x 4-Pole 32A Overload Breaker

Outputs

- 3 x 32A 1-Phase L+N+E Circuits
- 3 x 32A 3-Pin C-form connector
- 3 x 32A 1-Pole Overload Breaker

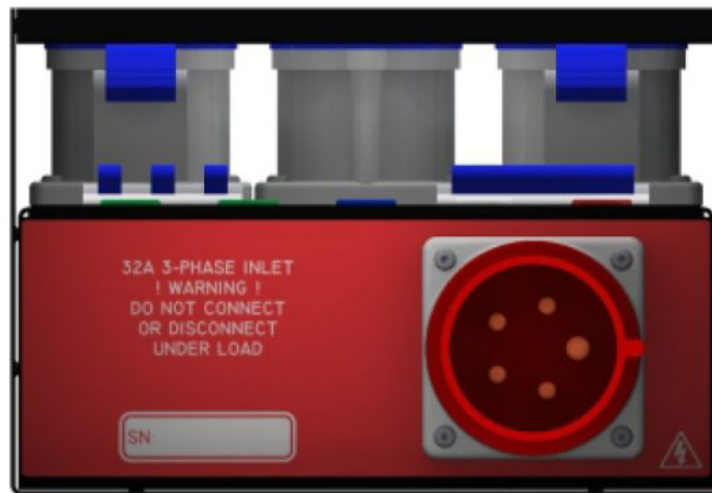

REAR VIEW

BART

DIMENSIONS:

- 241.2mm Wide
- 432.9mm Deep
- 165.0mm High

See all [Power Distribution Systems](#) here!