



Dewey II 63A 3-Phase Distro




Earth Leakage version shown

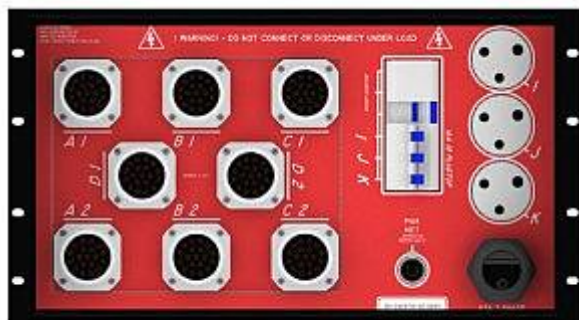

REAR VIEW
(8XSOCAPEX VERSION SHOWN)

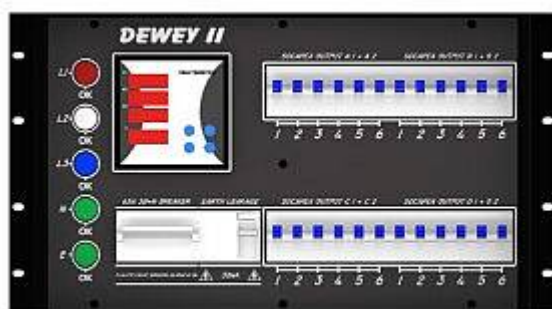

EARTH LEAKAGE VERSION

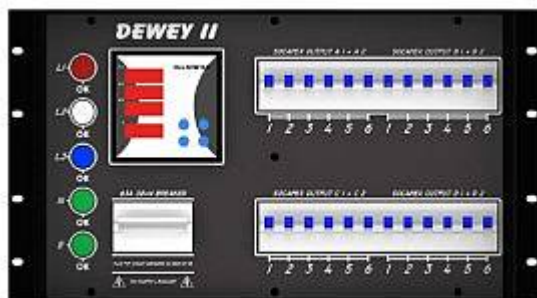

NON - EARTH LEAKAGE VERSION

APPLICATION:

High quality scalable power distribution for the Professional Audio Visual, Rental, Staging and Installation Markets.

KEY FEATURES:

- High Quality Rack Mount Enclosure
- Durable Laser Engraved Legend
- High Quality Circuit Breakers

- Rugged Connectors
- Integrated 3-Phase Digital Multimeter
- Microprocessor Controlled L1-L2-L3-N-E Status LED
- Designed to be used with our range of Socapex Sub-Distribution boards
- Service power outlets on dedicated Earth
- Leakage (Independent of main system)

OPTIONS:

Earth Leakage

30mA Earth leakage protection

No Earth leakage protection **

4 additional paralleled 19-Pin Socapex Outlets

Remote monitoring option ***

Stainless steel enclosure option for corrosive environments

SPECIFICATIONS:

Inputs

1 x 63A 380V 3-Phase L1-L2-L3+N+E

1 x 5-Pin 63A C-form plug on 1.5m cable

1 x 4-Pole 63A Overload Breaker

Outputs

4 x 19-Pin Socapex Outlets with 24 Independent Circuits

– Each outlet wired to 6-ch Lighting Standard

– 24 x 16A 1-Pole Overload Breaker

Service Outlets

30mA Earth Leakage Protected Service Sub-Distribution Board

3 x 16A SA Service Plug *

3 x 16A 1-Pole Overload Breaker

* Available with BS Standard / Euro Standard Outlet

** Please consult local electrical regulations for approvals

*** Requires separate network management unit (sold separately)

DIMENSIONS:

19" Rack Standard

6u Rack Space

436.4mm Mounting depth

- [Download brochure](#)